


31x31 luminaire

RANGE	PROFILE 31x31 LUMINAIRE
REF.	QBOP31X31S-
TYPE	SURFACE MOUNTING
DIMENSIONS	31x 31x ≤ 3000 mm
MATERIAL	ALUMINUM
FINISH	WHITE / ALUMINUM / BLACK
VOLTAGE	100 - 277 V
FREQUENCY	50 / 60 Hz
FEEDER KIT	INCLUDED
DIMMABLE	YES (DALI)
POWER	18 W
POWER FACTOR	0,95
SERVICE LIFE	> 72.000 HRS
INSULATION CLASS	CLASS II
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT
COLOR TEMPERATURE	2700 / 3000 / 4000 K
CRI	90
LIGHTING FLUX	2574 / 2646 / 2850 lm/m
LUMINOUS EFFICACY	143 / 147 / 158,3 lm/W
MACADAM ELLIPSE	3
LPM	140 lpm
WARRANTY	5 YEARS

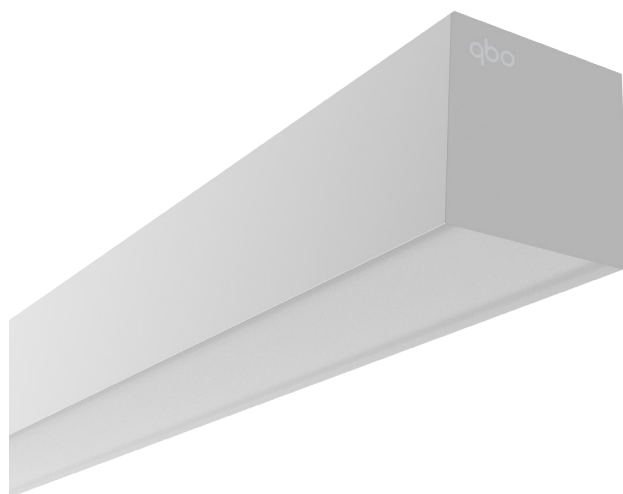

reference builder

TYPE	INSTALL	POWER	C. TEMP	CRI	FINISH	DIMING	DISTANCE	
P31X31 (profile)	S (surface)	18 (18W)	27 (2700K)	90 (CRI>90)	01 (anodized aluminium)	-	.1200 (1200mm)	
			30 (3000K)		02L (pale gold)		(on/off)	.1500 (1500mm)
	Y (suspended)		40 (4000K)		19L (bronze)	D (dali)	.2000 (2000mm)	
					22L (copper)		.3000 (3000mm)	
						09 (black anodized)		
						00L (white)		

Other color temperatures, IP rating and finishes available under request

Driver NOT included.

Different distance available under request.

Order example:

P31X31 S 18 40 90 09 D .2000

Profile 31x31 surface 18W/m 4000K CRI90 black dali 2000 mm

