

GT3 trimless spot

RANGE	QBO GT3 PROFILE TRIMLESS SPOT
REF.	QBOPGT3TSP4-
INSTALL	FRAME / TRIMLESS
MATERIAL	ALUMINIUM
FINISH	WHITE
VOLTAGE	200 - 240 V
FREQUENCY	50 / 60 Hz
FEEDER KIT	300 mA
DIMMABLE	YES
POWER	6,7 W
SERVICE LIFE	> 72.000 HRS
INSULATION CLASS	CLASS II
IP RATING	IP20
OPERATING TEMPERATURE	-40°C to +65° C
LIGHTING DISTRIBUTION	DIRECT
COLOR TEMPERATURE	3000 K
CRI	80
MCADAM	3
LIGHTING FLUX	1180 lm
LUMINOUS EFFICACY	176 lm/w
OPENING DEGREES	50° / 80°
WARRANTY	5 YEARS

*Linear plate included for recessed installation



reference builder

PROFILE	TYPE	MODULE	INSTALL	C. TEMP	CRI	BEAM	DIMING
PGT3 (profile)	SPT (luminaire)	4 (4 LED)	F (frame)	27 (2700K)	90 (CRI>90)	50 (50°)	- (on/off)
		7 (7 LED)		30 (3000K)			D (dali)
		14 (14 LED)	TS (trimless)	40 (4000K)		80 (80°)	tuneable white
		28 (28 LED)	tuneable white	2765 (2700 - 6500K)		TW (tuneable white)	

Other color temperatures, IP rating and finishes available under request
Different distance available under request.


Order example:

PGT3 SPT 7 S 30 90 50 D

Profile GT3 spot7 surface 3000K CRI90 50° dali.

tuneable white	tuneable white
SPT 4: 6,7 / 3,9 W & 150 mm	SPT 7: 11,8 / 5,9 W & 290 mm
SPT 14: 23,6 / 11,8 W & 570 mm	SPT 28: 47,2 / 23,6 W & 1130 mm

-Spot GT3 Frame:

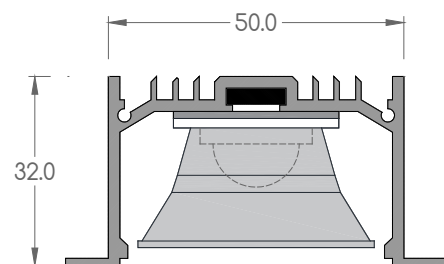

-Spot GT3 trimless:

